


MOTO  TOOL[®]



OWNER'S MANUAL & WARRANTY

CONTROLLER - FEATURES

1. LCD Digital Display
2. Handpiece Connector
3. On/Off and Speed Control
4. AC Charging Connector
5. Forward/Reverse Slide Switch
6. Foot Pedal Connector
(Pedal sold separately)

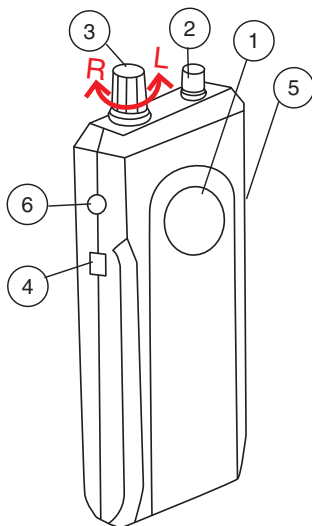

CONTROLLER - OPERATION



LED Battery Indicator:


- Power on:
Will illuminate digital display
- Flashing center circle:
Alert to charge
- All circles solid white:
Charging complete

Speed control knob:

- Rotate clockwise to turn on
and increase speed.
- Rotate counter clockwise to
turn off and lower speed.
- Always turn off when
not in use.

HANDPIECE - OPERATION

1. Before changing bits power must be off and rotation completely stopped.
2. Hold the handpiece pointing upward with your left hand.
3. Using your right hand turn the metal set ring towards you to unlock the chuck for insertion of the bit.
4. Using your right hand turn the metal set ring away from you to lock the bit in place.
5. Spin the locked bit by hand and pull on it to make sure it is securely locked before powering on.

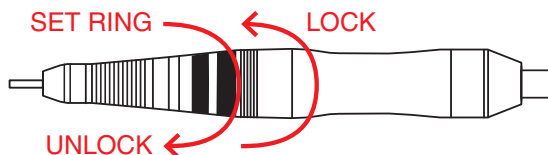

CAUTION - SAFETY



This product uses a lithium-ion battery.

When not in use, store in a dry, well ventilated place. Avoid high temperature and direct sunlight.



Do not touch bits while the handpiece is rotating.



Use only the original factory AC adapter for charging.



Always wear a dust mask and eye protection for safety.

ERROR CODES - POSSIBLE CAUSES

- E1 - Lock Rotation:**
- Set Ring is in the open position.
 - Bit not properly installed.
 - Handpiece connector or cord issue.
- E2 - Overload:**
- Heavy load is applied for an excessive period of time.
- E3 - Over Heating:**
- Extreme or excessive use, wait 20 minutes for the unit to cool down.

IN ALL CASES AFTER ADJUSTMENT TURN SPEED KNOB ON AND OFF. IF THE PROBLEM IS RESOLVED, THE ERROR CODE WILL CLEAR.

SPECIFICATIONS:

CONTROLLER:

Size: 5.5" x 2.7" x 0.67"

Weight: 9oz.

HANDPIECE:

Size: 5.65" x .78"

Weight: 3.2 oz.

0-35,000 RPM Brushless Motor

BATTERY:

Input: 100-240V-

56/60Hz

Output: 12.60V 950mA

WARRANTY:

DEDECO INTERNATIONAL, INC. recognizes its responsibility to replace or issue credit for products as are proven to be defective. We do not accept liability for any loss or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, the user shall determine the suitability of the product for its intended use and the user assumes all risk and liability whatsoever in connection therewith. The foregoing may not be changed except by an agreement signed by an officer of the corporation.

Warranty Period: SIX (6) MONTHS from date of purchase.



Dedeco International, Inc.

11617 State Route 97, Long Eddy, New York 12760-0244

Phone: (845) 887-4840 • Fax: (845) 887-5281

service@dedeco.com • www.dedeco.com